



weld
ILLUMINAZIONE LED

**3 ANNI DI
GARANZIA**




VITA UTILE
60.000 h



IP65

AC 220V

VEGA220S-60L5050-65VIOLET

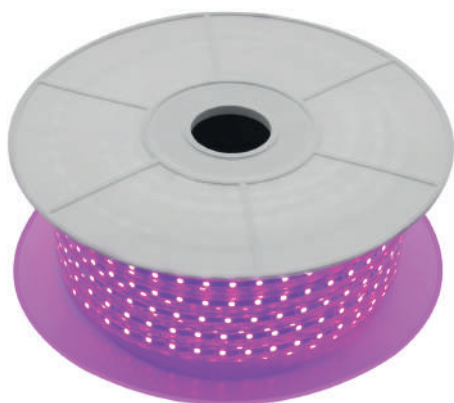

Caratteristiche Elettriche

Tensione:	85 - 277 V
Frequenza:	50 - 60 Hz
Potenza:	10W/mt
Corrente LED:	200 mA
Fattore di potenza:	≥0.90
Temperatura di esercizio:	-30 / + 50 °C

Specifiche chip LED

Tipo LED:	SMD 5050
Numero LED:	60/mt
Colore luce:	VIOLA
Vita utile:	> 60.000 h corrente modulo LED 600mA (Ta25°)

Caratteristiche emissione

Flusso luminoso:	1.220 Lm/mt
Angolo di diffusione:	120°
Resa cromatica:	CRI ≥ 80


Protezioni

Grado di protezione lampada:	IP65
Grado di protezione driver:	IP65

Conformità e certificazioni componentistica

EN 60598-1:2008/A11:2009:Luminaires - General requirements and tests. EN 60598-2-5:1998:Luminaires - Particular requirements. EN 62471:Photo biological safety of lamps and lamp systems. EN 62493:2010:Assessment of lighting equipment related to human exposure to electromagnetic fields. EN 55015:2006/A1:2007/A2:2009:Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment. Equipment for general lighting purposes - EMC requirements. EN 61547:2009: Limits for Harmonic emissions (<16A per phase). EN 61000-3-2:2006/A1:2009/A2:2009/EN 61000-3-3:2008: Limits. (Limitation of voltage changes, voltage fluctuations and flicker in public low voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection)

FOTOMETRIE

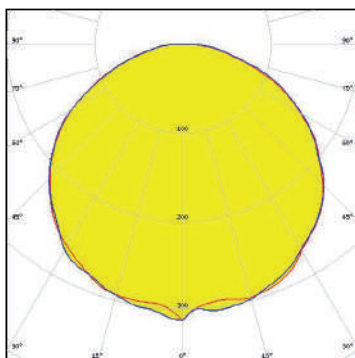

120°

Peso: 0.5 Kg



VITA UTILE
60.000 h



IP65

AC 220V