



**weld**  
ILLUMINAZIONE LED

**3 ANNI DI  
GARANZIA**



VITA UTILE  
**60.000 h**



**IP65**

**AC 220V**

# VEGA220S-60L5050-65



## Caratteristiche Elettriche

|                           |               |
|---------------------------|---------------|
| Tensione:                 | 85 - 277 V    |
| Frequenza:                | 50 - 60 Hz    |
| Potenza:                  | 10W/mt        |
| Corrente LED:             | 200 mA        |
| Fattore di potenza:       | ≥0.90         |
| Temperatura di esercizio: | -30 / + 50 °C |

## Specifiche chip LED

|              |                                              |
|--------------|----------------------------------------------|
| Tipo LED:    | SMD 5050                                     |
| Numero LED:  | 60/mt                                        |
| Colore luce: | 3000K - 4000K - 6000K                        |
| Vita utile:  | > 60.000 h corrente modulo LED 600mA (Ta25°) |

## Caratteristiche emissione

|                       |             |
|-----------------------|-------------|
| Flusso luminoso:      | 1.220 Lm/mt |
| Angolo di diffusione: | 120°        |
| Resa cromatica:       | CRI ≥ 80    |


## Protezioni

|                              |      |
|------------------------------|------|
| Grado di protezione lampada: | IP65 |
| Grado di protezione driver:  | IP65 |

## Conformità e certificazioni componentistica

EN 60598-1:2008/A11:2009:Luminaires - General requirements and tests. EN 60598-2-5:1998:Luminaires - Particular requirements. EN 62471:Photo biological safety of lamps and lamp systems. EN 62493:2010:Assessment of lighting equipment related to human exposure to electromagnetic fields. EN 55015:2006/A1:2007/A2:2009:Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment. Equipment for general lighting purposes - EMC requirements. EN 61547:2009: Limits for Harmonic emissions (<16A per phase). EN 61000-3-2:2006/A1:2009/A2:2009/EN 61000-3-3:2008: Limits. (Limitation of voltage changes, voltage fluctuations and flicker in public low voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection)

# FOTOMETRIE

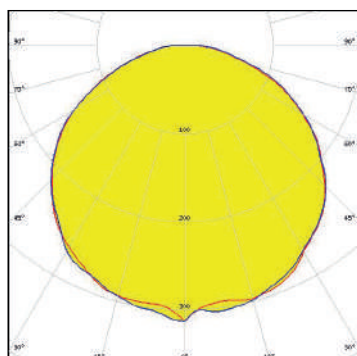

**120°**

**Peso: 0.5 Kg**



VITA UTILE  
**60.000 h**



**IP65**

**AC 220V**