



weld
ILLUMINAZIONE LED

**3 ANNI DI
GARANZIA**



VITA UTILE
60.000 h



IP67

AC 220V

VEGA220T-120L2835-67BLUE



Caratteristiche Elettriche

Tensione:	220 - 240 V
Frequenza:	50 - 60 Hz
Potenza:	10W/mt
Corrente LED:	200 mA
Fattore di potenza:	≥0.90
Temperatura di esercizio:	-20 / + 50 °C

Specifiche chip LED

Tipo LED:	SMD 2835
Numero LED:	120/mt
Colore luce:	BLU
Vita utile :	> 60.000 h corrente modulo LED 600mA (Ta25°)

Caratteristiche emissione

Flusso luminoso:	1250 Lm/mt
Angolo di diffusione:	280°
Resa cromatica:	CRI ≥ 80

Protezioni

Grado di protezione lampada:	IP67
Grado di protezione driver:	IP67

Caratteristiche meccaniche

Materiale corpo lampada:	Alluminio/PC
Tipo diffusore:	PMMA prismatico
Colore:	Bianco

Controllo del flusso (su richiesta)


Interfaccia di dimmerazione:	0-10 / DALI / NFC
Sistema Smart-Lighting:	Controllo punto-punto DALI - Bluetooth
Classe energetica:	A++ / C.A.M. Respected

Conformità e certificazioni componentistica

EN 60598-1:2008/A11:2009:Luminaires - General requirements and tests. EN 60598-2-5:1998:Luminaires - Particular requirements. EN 62471:Photo biological safety of lamps and lamp systems. EN 62493:2010:Assessment of lighting equipment related to human exposure to electromagnetic fields.

EN 55015:2006/A1:2007/A2:2009:Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment. Equipment for general lighting purposes - EMC requirements. EN 61547:2009: Limits for Harmonic emissions (<16A per phase). EN 61000-3-2:2006/A1:2009/A2:2009/EN 61000-3-3:2008: Limits. (Limitation of voltage changes, voltage fluctuations and flicker in public low voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection)

FOTOMETRIE

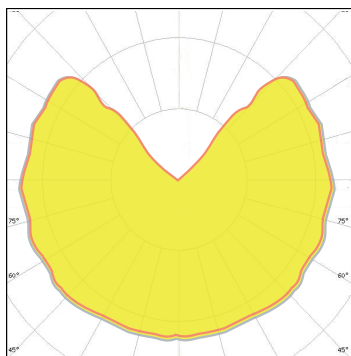

280°

Peso: 1.0 Kg



VITA UTILE
60.000 h



IP67

AC 220V



WELD ILLUMINAZIONE SRL - C.da Colamazza snc, 89900 Vibo Valentia (VV) - Tel. 0963-70402 Mail: info@weldilluminazione.it - Web: WWW.WELDILLUMINAZIONE.IT